




Fortress[®] ANSI •

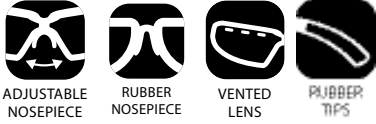

Adjustable rubber nosepiece // Straight-back rubber coated temple tips // Vented lens allows airflow to prevent fogging // Custom imprinting available

Black Frame | 4 Variations

- SB 3710D • Clear
- SB 3710DT • Clear AF
- SB 3720D • Gray
- SB 3780D • I/O Mirror



Part No.	Lens Marking	Temple Marking	General Specifications	Materials
SB 3710D	P Z87 + U6	P Z87 +	Weight: 14.5 gm	Lens: polycarbonate
SB 3710DT	P Z87 + U6	P Z87 +	Bridge: 16.5 mm	Frame: nylon
SB 3720D	P Z87 + U6 L3	P Z87 +	Lens base: 8 curve	Temples: nylon
SB 3780D	P Z87 + U6 L1.7	P Z87 +	Lens size diagonal: 139 mm	Temple Tips: thermoplastic rubbers (TPR)
			Lens size vertical: 45 mm	Nosepiece: thermoplastic rubbers (TPR)
			Lens thickness: 2.2 mm	
			Overall length (lens - tip): 120 mm	
			Overall width (hinge - hinge): 148mm	

Lens Marking Symbols

P: Manufacturer's mark
 Z87: ANSI standard for eye and face protection devices
 +: High impact

UV Filter Transmittance

U6: .01% max effective far UV • .1% max near UV

Visible Light Filters

L1.7: 55% Max. Visible Light
 L3: 18% Max. Visible Light

Temple Marking Symbols

P: Manufacturer's mark
 Z87: ANSI standard for eye and face protection devices
 +: High impact