

GL611

Polyester + Acrylic | Nitrile | Sandy + Smooth

ANSI/ISEA 105-2016 – CUT A2 | PUNCTURE 3 | ABRASION 4
 EN388: 2016 – 4231X
 EN511: 2006 – X2X

Nitrile smooth palm, fingers + knuckles coating //
 Double dipped nitrile sandy palm coating // 13 gauge
 polyester outer liner // 10 gauge acrylic inner liner //
 Contact cold protection // Water-resistant

GL611 S – 2XL

Suggested Applications

Refrigerated Area // Utilities // Food Processing
 // Commercial Fishing // Construction // Outdoor
 Activities

Glove Breakdown

Type: Insulated Dipped Glove
Material: Nitrile Sandy + Smooth
Outer Liner: 13 Gauge Polyester
Inner Liner: 10 Gauge Acrylic
Cuff: Polyester + Acrylic + Latex Elastic

This product contains components that may be a potential risk to allergic reactions [latex in the wrist cuff]. Do not use in the event of hypersensitivity signs or a known allergy to latex.

Testing Performance

EN388: 2016 – 4231X


Abrasion	1	2	3	4		
Circular Blade Cut	1	2	3	4	5	X
Tear	1	2	3	4		
Puncture	1	2	3	4		
Cut TDM-100	A	B	C	D	E	F
Impact Rated	P	F	X			

EN511: 2006 – X2X

Convective Cold	1	2	3	4	X
Contact Cold	1	2	3	4	X
Water Penetration	0	1	X		

ANSI/ISEA 105-2016

Cut	1	2	3	4	5	6	7	8	9
Abrasion	1	2	3	4	5	6			
Puncture	1	2	3	4	5				

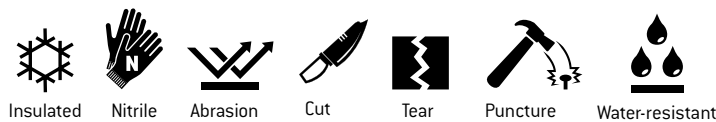

i Product markings may vary. Refer to the product sheet for the most current test report results.

Glove Sizing

The color of the binding around the cuff indicates the glove size.

Small 7	Medium 8	Large 9	X-Large 10	2X-Large 11
------------	-------------	------------	---------------	----------------

All sizes comply with EN 420:2003 for comfort, fit and dexterity. Only wear the correct size for your hand. Gloves that are too loose or too tight will restrict movement and will not provide the optimal level of protection.

Packaging

Pack: 12 pair
Case: 120 pair
Country of Origin: China